

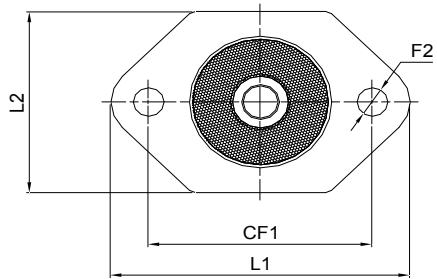
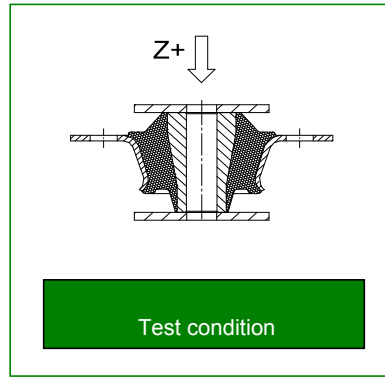
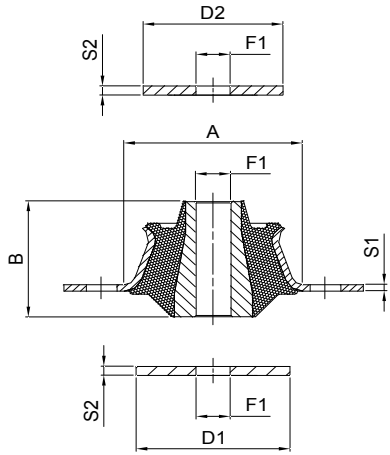
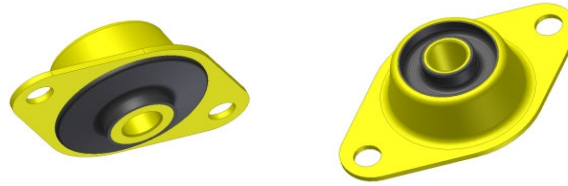
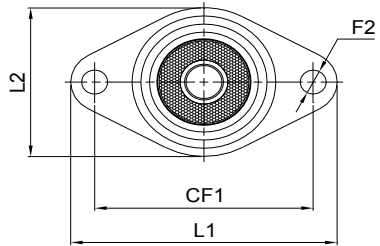


TYPE CN

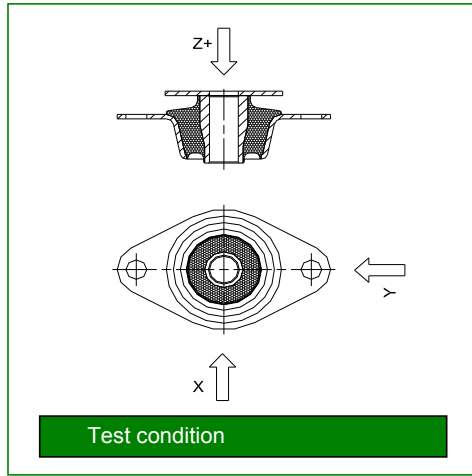




Item	Hardness (IRHD)	Dimensions (mm)												Average Stiffness (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)	
		A	B	CF1	CF2	L1	L2	F1	S1	F2	D1	D2	F1				S2
6051CN12W	45 IRHD	60	45	80	-	107	70	12,1	2,5	11	55	50	12,2	3,5	20	100	5
6051CN12M	60 IRHD	60	45	80	-	107	70	12,1	2,5	11	55	50	12,2	3,5	34	170	5
6051CN12H	70 IRHD	60	45	80	-	107	70	12,1	2,5	11	55	50	12,2	3,5	50	250	5

TYPE CN

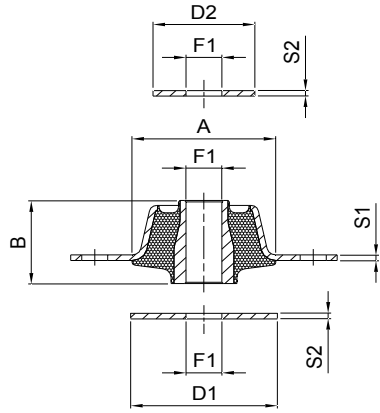




Item	Hardness (IRHD)	Dimensions (mm)													Average Stiffness Z+ (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)	Average Stiffness X Y (Kg/mm)
		A	B	CF1	CF2	L1	L2	F1	S1	F2	D1	D2	F1	S2				
4830CN10W	45 IRHD	48	30,2	73	-	89	54	10	2	8,7	49	34	10	2	9	36	4	30
4830CN10M	60 IRHD	48	30,2	73	-	89	54	10	2	8,7	49	34	10	2	15	60	4	40
4830CN10H	70 IRHD	48	30,2	73	-	89	54	10	2	8,7	49	34	10	2	21	84	4	50
4830CN12W	45 IRHD	48	30,2	73	-	89	54	12	2	8,7	49	34	12	2	9	36	4	30
4830CN12M	60 IRHD	48	30,2	73	-	89	54	12	2	8,7	49	34	12	2	15	60	4	40
4830CN12H	70 IRHD	48	30,2	73	-	89	54	12	2	8,7	49	34	12	2	21	84	4	50

TYPE CN

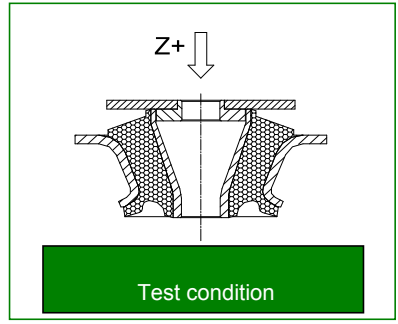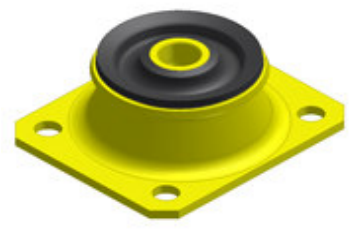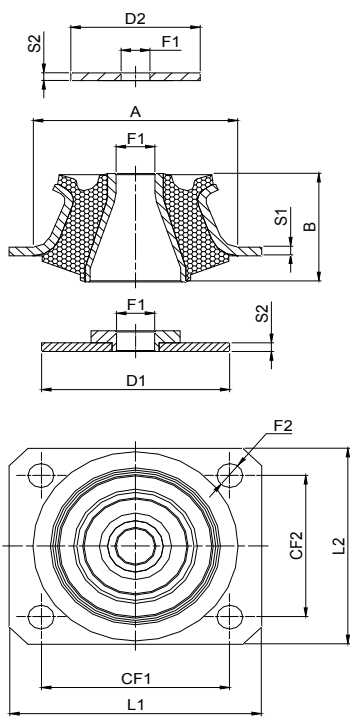




Item	Hardness (IRHD)	Dimensions (mm)												Average Stiffness (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)	
		A	B	CF1	CF2	L1	L2	F1	S1	F2	D1	D2	S2				F1
7856CN16W	45 IRHD	78	50	80	65	107	90	16.5	4	11	80	65	4	16	32	160	5
7856CN16M	60 IRHD	78	50	80	65	107	90	16.5	4	11	80	65	4	16	60	350	5
7856CN16H	70 IRHD	78	50	80	65	107	90	16.5	4	11	80	65	4	16	98	488	5
7856CN20W	45 IRHD	78	50	80	65	107	90	20	4	11	80	65	4	20	32	160	5
7856CN20M	60 IRHD	78	50	80	65	107	90	20	4	11	80	65	4	20	60	350	5
7856CN20H	70 IRHD	78	50	80	65	107	90	20	4	11	80	65	4	20	98	488	5

TYPE CN

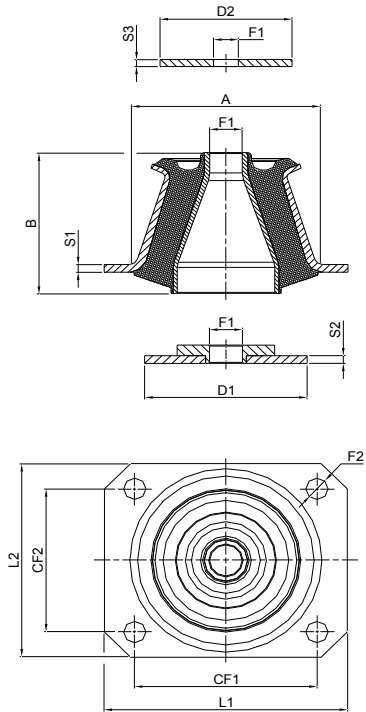




Item	Hardness (IRHD)	Dimensions (mm)												Average Stiffness (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)	
		A	B	CF1	CF2	F1	F2	S1	L1	L2	D1	D2	S2				S3
9381CN16W	45 IRHD	93	73	90	74	16	11	4	120	100	80	70	5	4	75	450	6
9381CN16M	60 IRHD	93	73	90	74	16	11	4	120	100	80	70	5	4	140	840	6
9381CN16H	70 IRHD	93	73	90	74	16	11	4	120	100	80	70	5	4	235	1410	6

TYPE CN

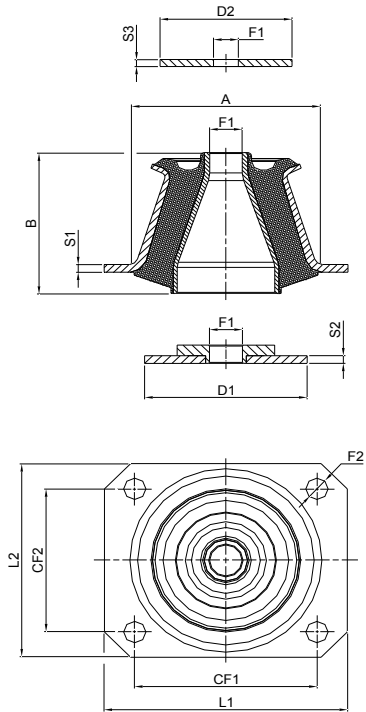

Item	Hardness (IRHD)	Dimensions (mm)												Average Stiffness (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)	
		A	B	CF1	CF2	F1	F2	S1	L1	L2	D1	D2	S2				S3
10995CN20W	45 IRHD	109	85	112	92	20	11	4.5	140	120	110	80	5	5	115	460	4
10995CN20M	60 IRHD	109	85	112	92	20	11	4.5	140	120	110	80	5	5	250	1125	4,5
10995CN20H	70 IRHD	109	85	112	92	20	11	4.5	140	120	110	80	5	5	370	1850	5

TYPE CN

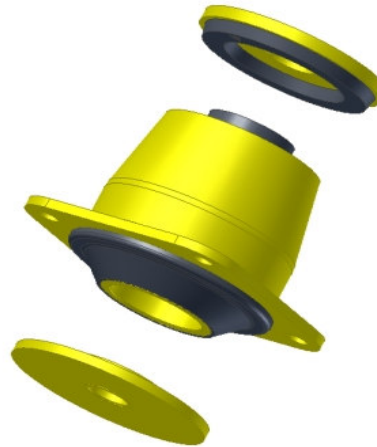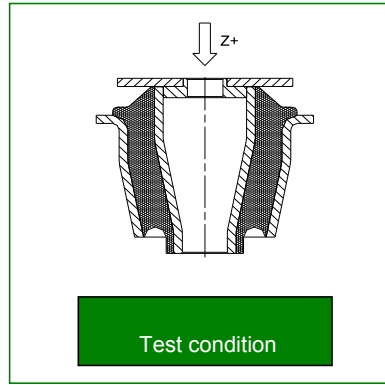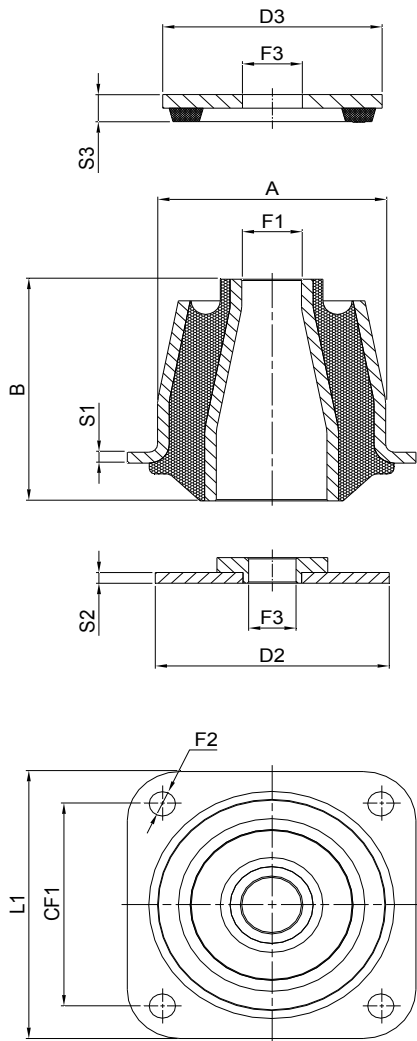

Item	Hardness (IRHD)	Dimensions (mm)						
		A	B	CF1	F1	F2	S1	L1
7882CN20W	45 IRHD	78	82	75	20,5	9	4	99
7882CN20M	60 IRHD	78	82	75	20,5	9	4	99
7882CN20H	70 IRHD	78	82	75	20,5	9	4	99

					Average Stiffness (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)
D2	S2	D3	S3	F3			
80	4	74	10	20,5	42	336	8
80	4	74	10	20,5	85	680	8
80	4	74	10	20,5	132	1056	8