




ANTI VIBRATION BASE WITH FIXED SCREW

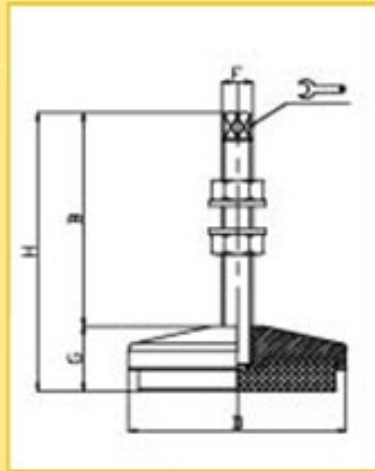


CODE	MAIN DIMENSIONS						DYNAMIC LOAD Lbs.	STATIC LOAD Lbs.
	B	D		F	G	H		
13180V	83	84	8	M12	30	113	670	1345
13190V	121	104	9	M14	34	155	1340	2470
13200V	125	120	10	M16	37	162	1570	2920
13210V	128	140	10	M16	45	173	1800	3595
13220V	135	160	13	M20	45	180	2695	5620
13230V	135	180	13	M20	45	180	3820	7865
13232V	135	230	16	M24	55	190	5620	11,240

Code V = yellow painted

CODE	MAIN DIMENSIONS						DYNAMIC LOAD Lbs.	STATIC LOAD Lbs.
	B	D		F	G	H		
13240Z	83	84	8	M12	30	113	670	1345
13250Z	121	104	9	M14	34	155	1340	2470
13260Z	125	120	10	M16	37	162	1570	2920
13270Z	128	140	10	M16	45	173	1800	3595
13280Z	135	160	13	M20	45	180	2695	5620
13290Z	135	180	13	M20	45	180	3820	7865
13292Z	135	230	16	M24	55	190	5620	11,240

Code Z = galvanized steel

CODE	MAIN DIMENSIONS						DYNAMIC LOAD Lbs.	STATIC LOAD Lbs.
	B	D		F	G	H		
13300I	83	84	8	M12	30	113	670	1345
13310I	121	104	9	M14	34	155	1340	2470
13320I	125	120	10	M16	37	162	1570	2920
13330I	128	140	10	M16	45	173	1800	3595
13340I	135	160	13	M20	45	180	2695	5620
13350I	135	180	13	M20	45	180	3820	7865

Code I = stainless steel

Material:

Yellow painted/galvanized steel (C40) stainless steel AISI 304 base;

Galvanized / stainless steel screw AISI 304

Pad: rubber NBR 80 shore

The leveling mounts are provided with 2 nuts, 1 plain washer and 1 toothed washer.

Application: machine tools; presses; injection molding machines; shearing machines

For higher loads, an anti-vibration pad 90 shore can also be supplied.

Load values mentioned above refer to static conditions calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced. We cannot