
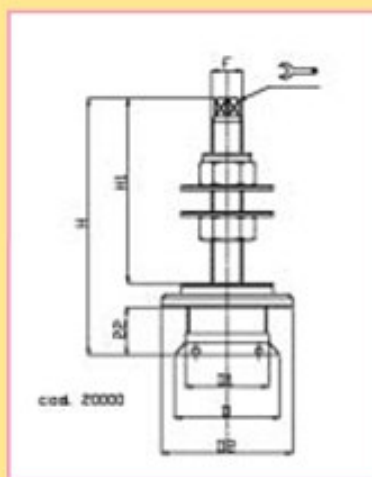



GLASS FIXING SYSTEM

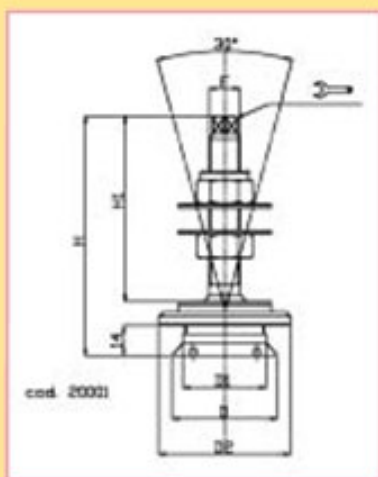

CODE	MAIN DIMENSIONS							MAXIMUM TRACTIVE LOAD
Standard	D	D1	D2		F	H	H1	
FIXED SCREW								
20000	48	38	60	9	M14	117	83	5510 Lbs
ARTICULATED SCREW								
20001	48	38	60	9	M14	115	88	5510 Lbs

Material: stainless steel screw AISI 316; stainless steel upper ring nut for the glass fixing; stainless steel lower ring nut for the glass positioning; stainless steel nut M14; stainless steel self-locking nut; 2 plain washers D42x3; white nylon washer; shaped shock absorber gasket in white NBR 90 shore.

Load values above refer to static conditions and are calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads, these values should be reduced. We cannot accept responsibility for mounts that have been tampered or modified