


## TEKNOCLEAN WITH STAINLESS STEEL BASE VULCANIZED RUBBER AND FIXING SYSTEM (3.15in/3.94in)

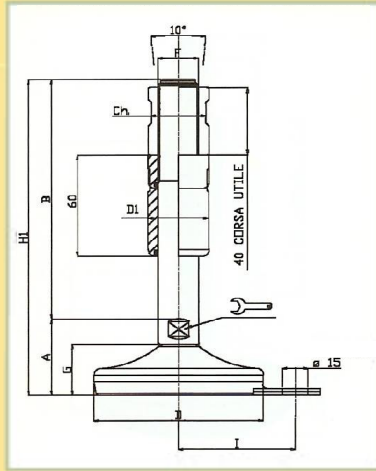

CODE	REGULATION STROKE	MAIN DIMENSIONS										STATIC LOAD Lbs
		A	B	D	17	D1	F	G	CH	H1	I	
27000/F	40mm	38	125	80	17	25	M16	25	20	163	54	2245
27002/F	40mm	38	150	80	17	25	M16	25	20	188	54	2245
27004/F	40mm	38	150	80	17	30	M20	25	26	188	54	2245
27020/F	40mm	43	150	100	17	25	M16	30	20	193	69	3370
27022/F	40mm	43	150	100	17	30	M20	30	26	193	69	3370
27024/F	40mm	44	150	100	20	35	M24	30	30	194	69	3370
27026/F	40mm	44	150	100	26	42	M30	30	36	194	69	3370

Designed for dairy, pharmaceutical and food industries which require the strictest hygienic regulations. The bushing is provided with a gasket, which by adhering to the smooth surface of the screw avoids any intrusion of dirt.

Material: stainless steel AISI 304 (AISI 316 available upon request)

Anti slip pad NBR 80 Shore. On request white E.P.D.M. (high resistance against solvents and chemical degreasers)

Load values mentioned above refer to static conditions calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced. We cannot accept responsibility for mounts that have been tampered or modified.