


GALVANIZED STEEL BASE (80mm/3.15in) ARTICULATED STEEL SCREW 10°

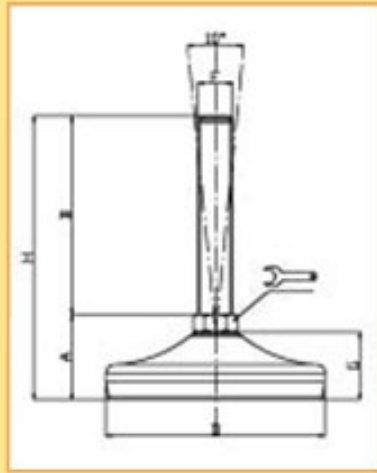

CODE	Description	MAIN DIMENSIONS							STATIC LOAD Lbs.
		A	B	D	KEYHOLE	F	G	H	
26000	M10x50	35	50	80	14	M10	25	85	2245
26004	M10x100	35	100	80	14	M10	25	135	2245
26010	M12x50	35	50	80	14	M12	25	85	2245
26014	M12x100	35	100	80	14	M12	25	135	2245
26018	M12x150	35	150	80	14	M12	25	185	2245
26022	M14x50	35	75	80	14	M14	25	110	2245
26024	M14x100	35	100	80	14	M14	25	135	2245
26028	M14x150	35	150	80	14	M14	25	185	2245
26034	M16x75	35	75	80	16	M16	25	110	2245
26036	M16x100	35	100	80	16	M16	25	135	2245
26040	M16x150	35	150	80	16	M16	25	185	2245


Base material: galvanized steel C40

Screw material: galvanized steel

Pad: vulcanized rubber NBR 80 shore

Load values mentioned above refer to static conditions calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced. We cannot accept responsibility for mounts that have been tampered or modified.

GALVANIZED STEEL BASE (80mm/3.15in) ARTICULATED STEEL SCREW 10°

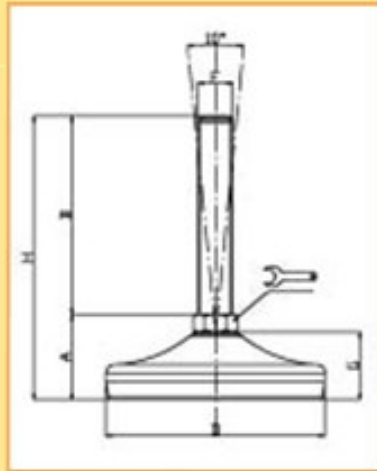

CODE	Description	MAIN DIMENSIONS							STATIC LOAD Lbs.
		A	B	D	KEYHOLE	F	G	H	
26050	M20x75	36	75	80	20	M20	25	111	2245
26052	M20x100	36	100	80	20	M20	25	136	2245
26054	M20x150	36	150	80	20	M20	25	186	2245
26058	M20x200	36	200	80	20	M20	25	236	2245
26070	M24x75	36	75	80	24	M24	25	111	2245
26072	M24x100	36	100	80	24	M24	25	136	2245
26076	M24x150	36	150	80	24	M24	25	186	2245
26080	M24x200	36	200	80	24	M24	25	236	2245


Base material: galvanized steel C40

Screw material: galvanized steel

Pad: vulcanized rubber NBR 80 shore

Load values mentioned above refer to static conditions calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced. We cannot accept responsibility for mounts that have been tampered or modified.

GALVANIZED STEEL BASE (100mm/3.9in) ARTICULATED STEEL SCREW 10°

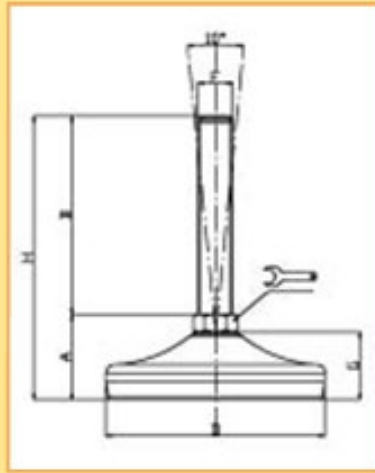

CODE	Description	MAIN DIMENSIONS							STATIC LOAD Lbs.
		A	B	D	KEY	F	G	H	
26090	M16x75	37.5	75	100	16	M16	28	112.5	3370
26092	M16x100	37.5	100	100	16	M16	28	137.5	3370
26096	M16x150	37.5	150	100	16	M16	28	187.5	3370
26100	M16x200	37.5	200	100	16	M16	28	237.5	3370
26110	M20x75	38.5	75	100	20	M20	28	113.5	3370
26112	M20x100	38.5	100	100	20	M20	28	138.5	3370
26116	M20x150	38.5	150	100	20	M20	28	188.5	3370
26120	M20x200	38.5	200	100	20	M20	28	238.5	3370
26124	M20x250	38.5	250	100	20	M20	28	288.5	3370
26130	M24x100	38.5	100	100	24	M24	28	138.5	3370
26134	M24x150	38.5	150	100	24	M24	28	188.5	3370
26140	M24x200	38.5	200	100	24	M24	28	238.5	3370
26144	M24x250	38.5	250	100	24	M24	28	288.5	3370
26150	M30x100	39.5	100	100	30	M30	28	139.5	3370
26154	M30x150	39.5	150	100	30	M30	28	189.5	3370
26158	M30x200	39.5	200	100	30	M30	28	239.5	3370
26162	M30x250	39.5	250	100	30	M30	28	289.5	3370

Base material: galvanized steel C40

Screw material: galvanized steel

Pad: vulcanized rubber NBR 80 shore

Load values mentioned above refer to static conditions calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced. We cannot accept responsibility for mounts that have been tampered or modified.