


Application


elasto-Flex Elements are used for the protection of light to medium weight equipment against active or passive vibrations and structure-borne noise. Vertically pliant, this element has a sufficient horizontal stiffness that restricts any lateral movement of the object mounted

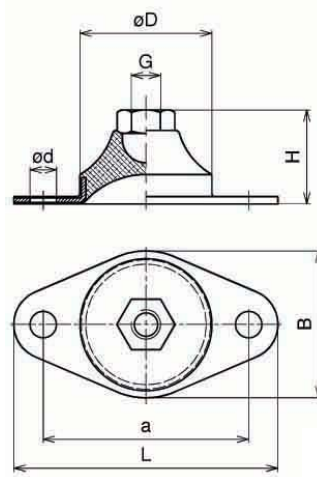


Part No.	Length		Height		Wide		hole sep.		Diameter		Thread (G)	Hole		Tech Info	Elastomer	ShoreA
	mm (L)	in (L)	mm (H)	in (H)	mm (B)	in (B)	mm (a)	in (a)	mm (D)	in (D)		mm (d)	in (d)			
H6020W	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	M6	6	0,24	Tech Info	NR	43
H6020	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	M6	6	0,24	Tech Info	NR	57
H6020H	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	M6	6	0,24	Tech Info	NR	68
H6020UW	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	UNC1/4-20	6	0,24	Tech Info	NR	43
H6020U	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	UNC1/4-20	6	0,24	Tech Info	NR	57
H6020UH	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	UNC1/4-20	6	0,24	Tech Info	NR	68
H9032W	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	M10	9	0,35	Tech Info	NR	43
H9032	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	M10	9	0,35	Tech Info	NR	57
H9032H	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	M10	9	0,35	Tech Info	NR	68
H9032UW	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	UNC5/16-18	9	0,35	Tech Info	NR	43
H9032U	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	UNC5/16-18	9	0,35	Tech Info	NR	57
H9032UH	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	UNC5/16-18	9	0,35	Tech Info	NR	68
H14050W	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	M16	13	0,51	Tech Info	NR	43
H14050	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	M16	13	0,51	Tech Info	NR	57
H14050H	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	M16	13	0,51	Tech Info	NR	68
H14050UW	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	UNC5/8-10	13	0,51	Tech Info	NR	43
H14050U	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	UNC5/8-10	13	0,51	Tech Info	NR	57
H14050UH	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	UNC5/8-10	13	0,51	Tech Info	NR	68

Application


elasto-Flex Elements are used for the protection of lightweight to medium weight equipment against active or passive vibrations and structure-borne noise. Vertically pliant, this element has a sufficient horizontal stiffness that restricts any lateral movement of the object be mounted.

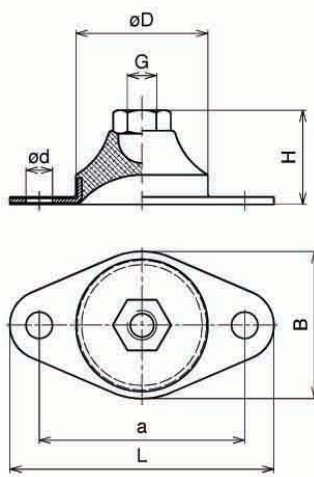

elasto-Flex-Elements Type 60

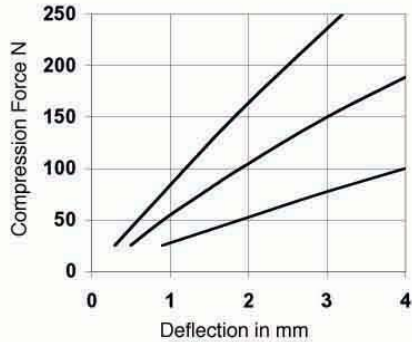

elasto-Flex-Elements Type 90

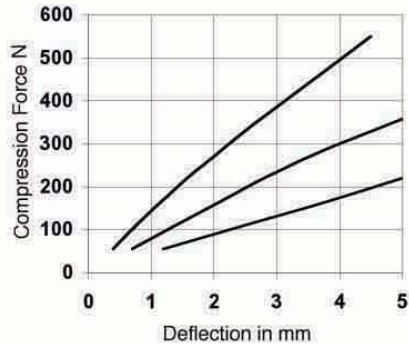

elasto-Flex-Elements Type 140

